



**GAI-TRONICS® CORPORATION**  
A HUBBELL COMPANY

# Industrial Communications System Page/Party® Desktop Subset

## General Information

### Product Overview

The GAI-Tronics Industrial Communications System (ICS) Page/Party® is a modular industrial communications system that can include from two to possibly hundreds of stations. All stations are wired in parallel and additional stations can be added to the system at any time.

The desktop subset enables you to perform page and party line communication when installed with a remote amplifier. The remote subset includes a pressbar handset, an internal speaker with volume control, and a five-party rotary selector switch (multi-party subset only).

The desktop subset is designed for desktop placement or wall-mount installation. The compact size is made possible by housing most of the support electronics in a separate remote amplifier.

The subset is designed for indoor applications. The DB25 subset interconnect cable permits mounting up to 10 feet from the amplifier.

### Features

- Provides one-way page announcements over system speakers
- Provides full-duplex party line communication
- Durable, ABS plastic housing
- Built-in speaker with volume control

### Options

- Single party line operation
- Conformal coating for PCBA

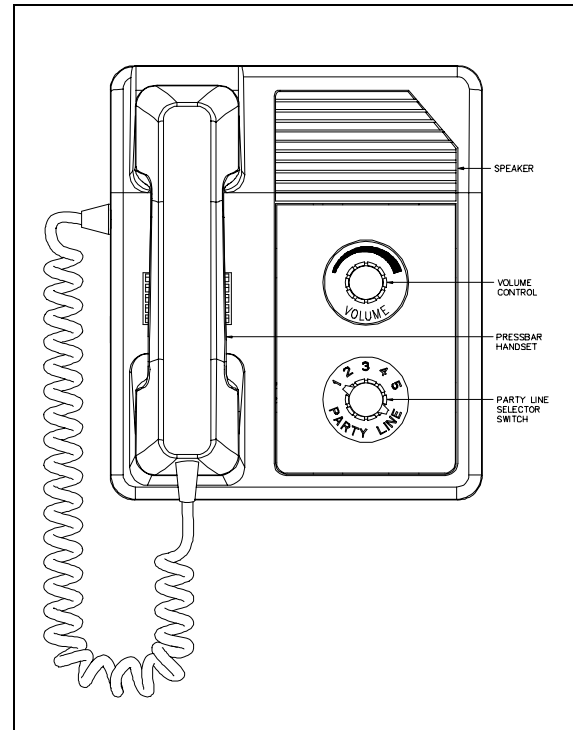


Figure 1. ICS Multi-Party Desktop Subset

# Installation

**! WARNING !** Do not install this equipment in hazardous areas. Such installations may cause a safety hazard and consequent injury or property damage.

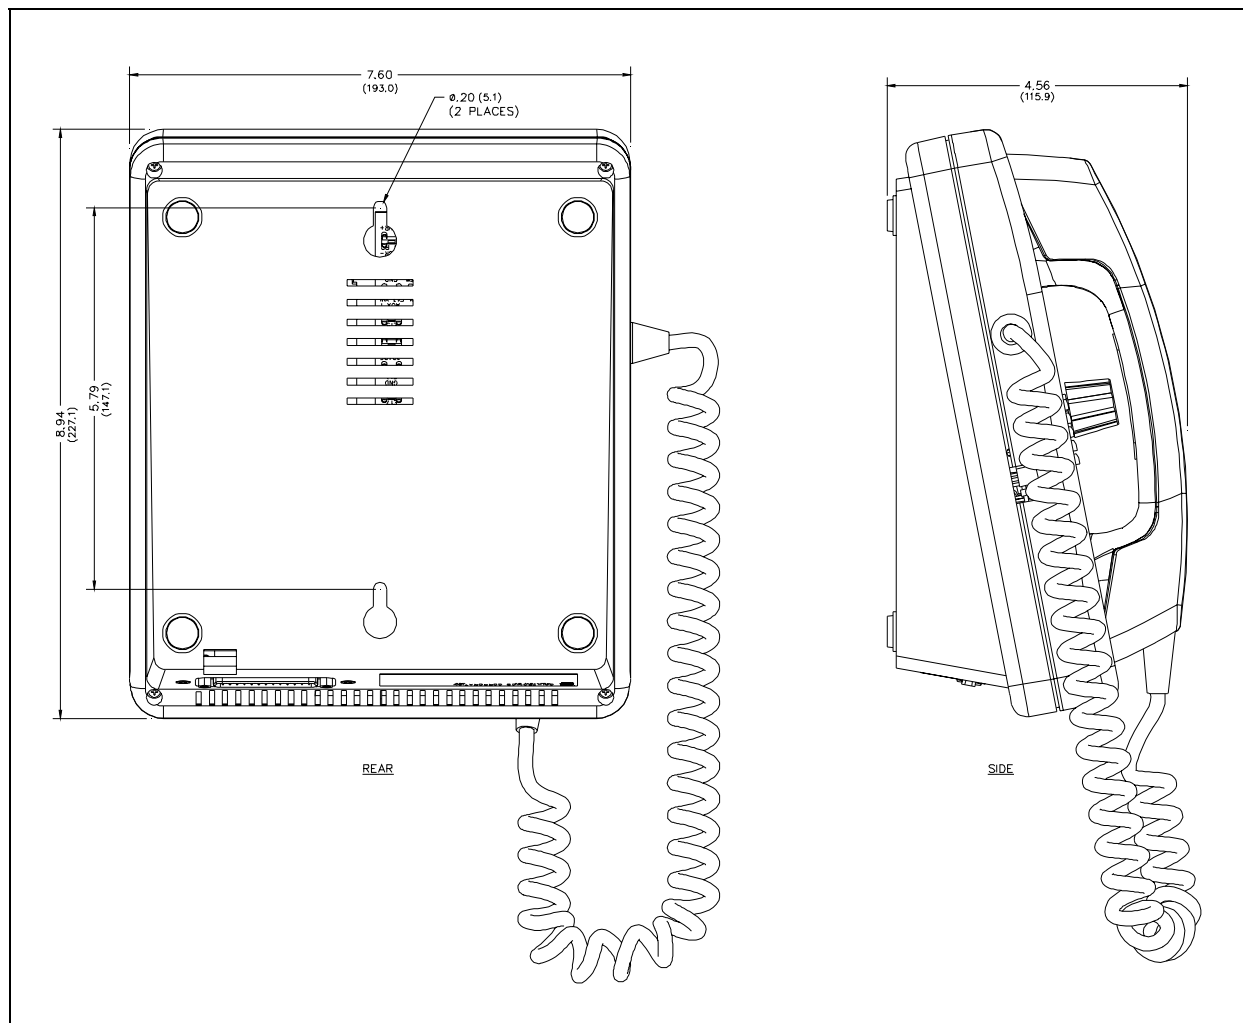


Figure 2. ICS Multi-Party Desktop (wall-mount) Subset Outline

**NOTE:** The desktop subset can be placed on a desk or can be wall mounted. When mounting the desktop subset to a wall, first remove the four screws from the bottom of the housing. Rotate the bottom section of the housing 180° and reassemble the top and bottom with the four screws. This will allow the subset to be attached to a vertical surface. To allow the handset to remain on hook when wall mounted, pull out the handset hook and rotate 180°.

1. Place the subset at the desired location and plug in the interconnect cable. Route the opposite end of the cable to the remote amplifier location.
2. Plug the interconnect cable into the remote amplifier.

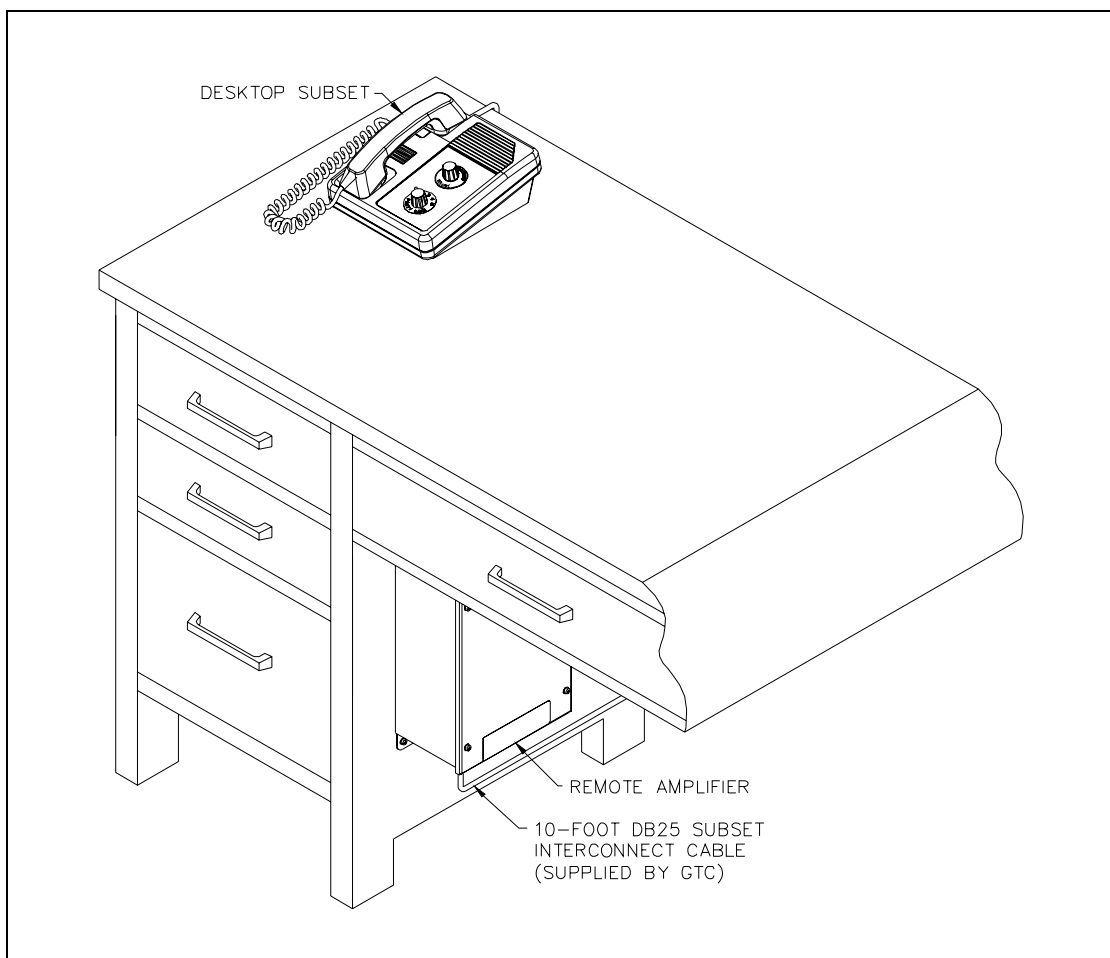


Figure 3. Typical Desktop Installation

## Operation

For paging and subsequent party line conversation, the station operator lifts the handset, selects a free party line using the five-position rotary selector switch (if equipped), and presses the handset pressbar. The station operator pages the desired individual and designates the party line on which that individual should respond. The individual then responds by approaching the nearest ICS Page/Party® station, selecting the appropriate party line and lifting the handset. Full-duplex communication can then be held on the party line without broadcasting over the speakers. After the conversation is complete, all parties should place the handset back on hook.

## Troubleshooting

The following table is provided to aid qualified service personnel in troubleshooting problems with the ICS Page/Party® subset.

Problem	Potential Cause
Subset is not functional.	<ul style="list-style-type: none"> <li>• Verify DB25 Interconnect cable is properly terminated between the subset and remote amplifier.</li> <li>• Refer to general troubleshooting section in ICS Page/Party® Remote Handset/Speaker Amplifier manual for adjustments and settings that affect ICS subset operation.</li> </ul>

## Specifications

### Handset

Microphone.....	Dynamic
Receiver.....	Dynamic, hearing aid compatible
Cord.....	Retractable, 6-foot extended, Hytrel
Material.....	ABS
External control.....	Push-to-page handset pressbar

### Subset Specifications

Construction/finish.....	Black ABS Cyclac housing with aluminum front panel
Mounting.....	Desktop or wall mount; two 0.20-inch (5.1 mm) mounting holes
Overall dimensions.....	8.94 H × 7.60 W × 4.56 D inches (227.1 × 193.0 × 115.8 mm)
Shipping weight.....	5.0 lbs. (2.3 kg)
Net weight.....	3.0 lbs. (1.4 kg)
Environmental	
Temperature range (operation and storage).....	-22° F to 158° F (-30° C to 70° C)
Humidity.....	95% non-condensing

### Approvals

NRTL certified for use in US and Canada.....	UL/CSA 60950
--	--------------

# Warranty

---

Equipment. GAI-Tronics warrants for a period of one (1) year from the date of shipment, that any GAI-Tronics equipment supplied hereunder shall be free of defects in material and workmanship, shall comply with the then-current product specifications and product literature, and if applicable, shall be fit for the purpose specified in the agreed-upon quotation or proposal document. If (a) Seller's goods prove to be defective in workmanship and/or material under normal and proper usage, or unfit for the purpose specified and agreed upon, and (b) Buyer's claim is made within the warranty period set forth above, Buyer may return such goods to GAI-Tronics' nearest depot repair facility, freight prepaid, at which time they will be repaired or replaced, at Seller's option, without charge to Buyer. Repair or replacement shall be Buyer's sole and exclusive remedy. The warranty period on any repaired or replacement equipment shall be the greater of the ninety (90) day repair warranty or one (1) year from the date the original equipment was shipped. In no event shall GAI-Tronics warranty obligations with respect to equipment exceed 100% of the total cost of the equipment supplied hereunder. Buyer may also be entitled to the manufacturer's warranty on any third-party goods supplied by GAI-Tronics hereunder. The applicability of any such third-party warranty will be determined by GAI-Tronics.

Services. Any services GAI-Tronics provides hereunder, whether directly or through subcontractors, shall be performed in accordance with the standard of care with which such services are normally provided in the industry. If the services fail to meet the applicable industry standard, GAI-Tronics will re-perform such services at no cost to buyer to correct said deficiency to Company's satisfaction provided any and all issues are identified prior to the demobilization of the Contractor's personnel from the work site. Re-performance of services shall be Buyer's sole and exclusive remedy, and in no event shall GAI-Tronics warranty obligations with respect to services exceed 100% of the total cost of the services provided hereunder.

Warranty Periods. Every claim by Buyer alleging a defect in the goods and/or services provided hereunder shall be deemed waived unless such claim is made in writing within the applicable warranty periods as set forth above. Provided, however, that if the defect complained of is latent and not discoverable within the above warranty periods, every claim arising on account of such latent defect shall be deemed waived unless it is made in writing within a reasonable time after such latent defect is or should have been discovered by Buyer.

Limitations / Exclusions. The warranties herein shall not apply to, and GAI-Tronics shall not be responsible for, any damage to the goods or failure of the services supplied hereunder, to the extent caused by Buyer's neglect, failure to follow operational and maintenance procedures provided with the equipment, or the use of technicians not specifically authorized by GAI-Tronics to maintain or service the equipment. **THE WARRANTIES AND REMEDIES CONTAINED HEREIN ARE IN LIEU OF AND EXCLUDE ALL OTHER WARRANTIES AND REMEDIES, WHETHER EXPRESS OR IMPLIED BY OPERATION OF LAW OR OTHERWISE, INCLUDING ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.**

## Return Policy

---

If the equipment requires service, contact your Regional Service Center for a return authorization number (RA#). Equipment should be shipped prepaid to GAI-Tronics with a return authorization number and a purchase order number. If the equipment is under warranty, repairs or a replacement will be made in accordance with the warranty policy set forth above. Please include a written explanation of all defects to assist our technicians in their troubleshooting efforts.

Call 800-492-1212 (inside the USA) or 610-777-1374 (outside the USA) for help identifying the Regional Service Center closest to you.